

acmaudio

ACTIVE DI-BOX




acmaudio

DI-300




Converting the output of a keyboard/ DJ-mixer/Headphone plug

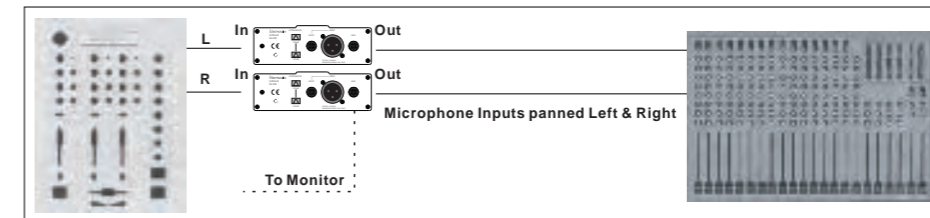

DJ-mixer — 2 x DI — Mixer

Tapping signal from the (Bass) guitar

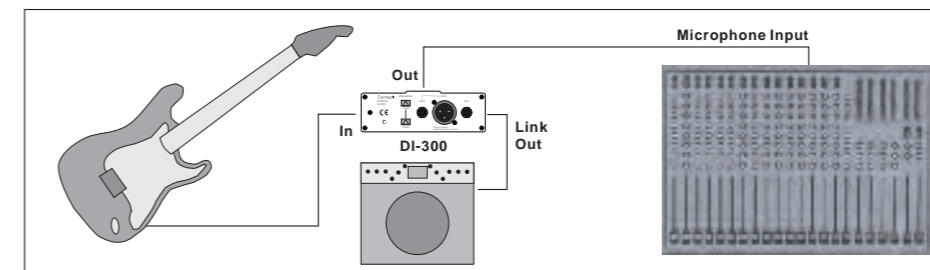

Guitar — DI — Amp/Mixer

Specifications

Frequency Response	10 Hz to 93kHz
Noise Level	-110 dBu
THD+N @ 1 kHz / 0 dBu	<0.005%
Input Impedance	>250 kOhm
Load Impedance	>600 Ohm
Inputs	1/4" ack unbal. In/Link Out XLR unbalanced In
Output	XLR balanced Out
Maximum Input level	+10/+30/+50 dBu

Power supply	18 V DC to 48 V DC
Phantom power	9 V blockcell 6LR91
Battery	9 V blockcell 6LR91
Dimensions	82mm X 164mm X 155mm
Weight	500g